



Amazon Fire Tablet (5th Generation)

Repairability Assessment

Repairability assessment for the Amazon Fire Tablet, 5th Generation performed on January 5, 2017.

Written By: Scott Havard



INTRODUCTION

Disassembly of the Amazon Fire Tablet 5th Generation revealed a simple design with a LCD display, motherboard, battery, and unfused digitizer. The digitizer and battery adhesives needed some elbow grease to break through, but overall we were happy to award this design a 7 out of 10 for repairability.



TOOLS:

- [iFixit Opening Tool](#) (1)
 - [Plastic Cards](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Amazon Fire Tablet (5th Generation) Repairability Assessment




- Front and back reference shots.

Step 2




- There are only clips holding the assembly together. No adhesive makes for much easier device access.
- The plastic back cover comes off to reveal the battery, motherboard, and display hiding on the other side.
- We can also see smaller components, including a speaker and a camera.

Step 3

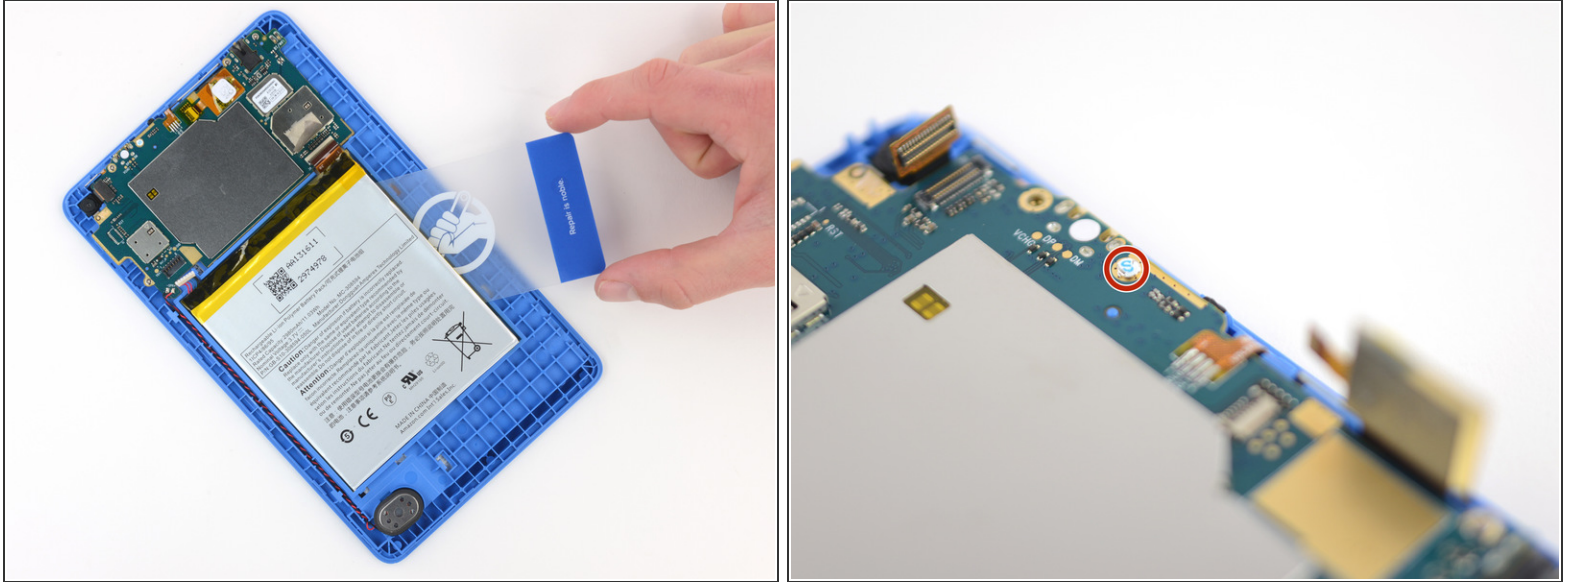


- This battery isn't super easy to remove. It's held in with several adhesive strips that require force to separate.
- We use a card to fight the adhesive and we can pry the battery out with a bit of effort.
- At the top of the motherboard there's a little tamper evident sticker.

Step 4

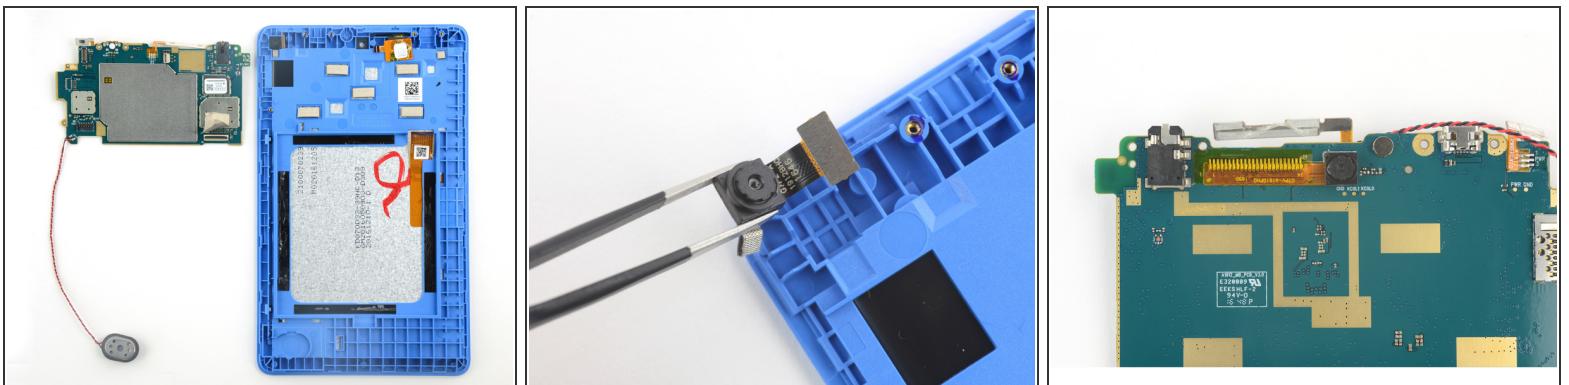

- We can remove the motherboard after removing five Phillips screws, and disconnecting two ZIF and two press connectors.
- Front-facing camera is modular and easily pops out.
- Rear-facing camera is soldered to the board and not going anywhere.


Step 5

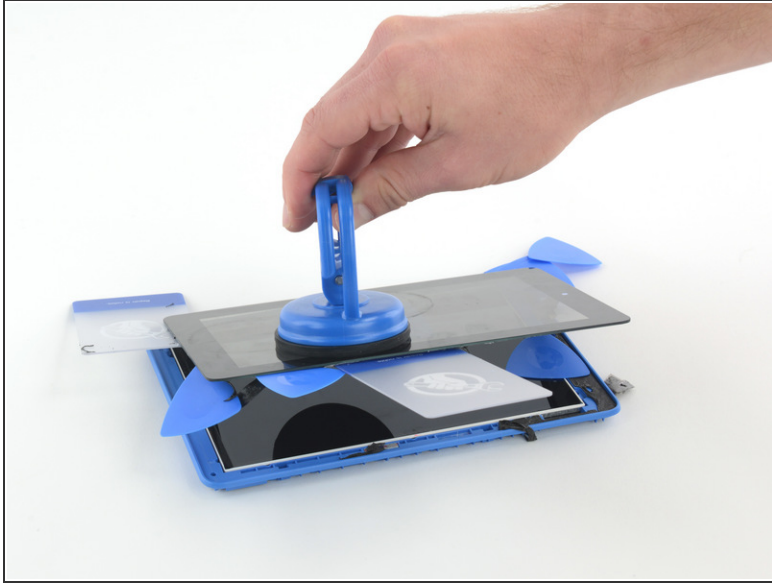

- Just the display assembly's left. How hard is a digitizer replacement?

ⓘ Hard.

Step 6

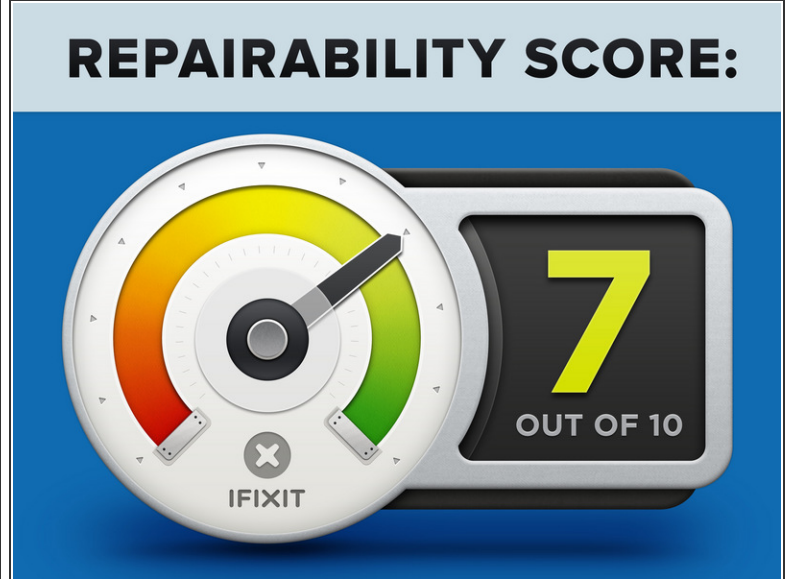

- The Amazon Fire Tablet earns a **7 out of 10** on our repairability scale (10 is the easiest to repair):
 - The plastic case assembly is held together by clips and no adhesive, and opening only requires prying with an iFixit opening tool.
 - The digitizer and LCD panel are not fused together.
 - All of the screws in the device are Phillips screws.
 - The battery is modular, but it is held in place by somewhat stubborn adhesive.
 - Removing the digitizer and LCD panel requires fighting through some very resilient adhesive.
 - Manufacturer does not provide user-accessible repair documentation.

This document was last generated on 2017-06-27 05:02:35 PM.